




AV over Ethernet Adaptor



System Structure

Each user can work independently

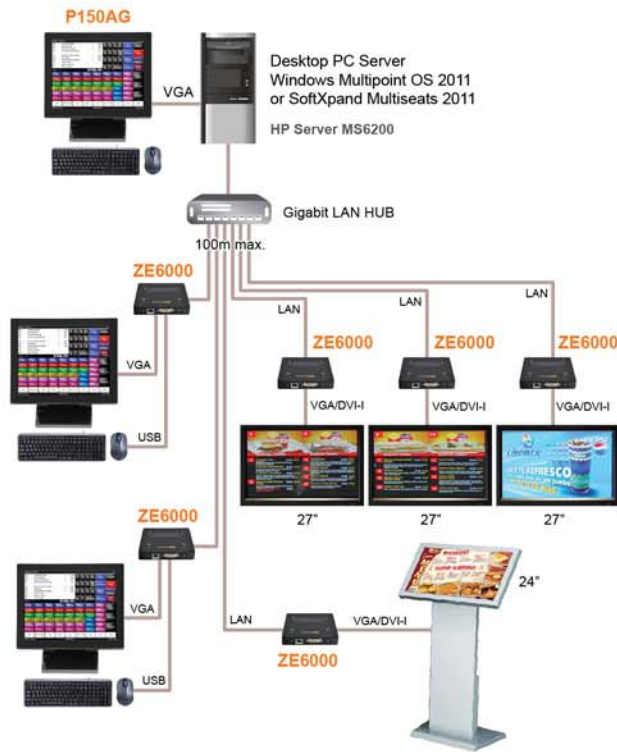

Application


Digital Signage / Media Price Checker
Training Center / Kiosk

Specification

ZE6000		
Power Brick	AC adaptor input	AC100V~240V, 50~60Hz
	DC power output	12Vdc @1.5A
Power Consumption		3 watts + 10 watts full USB bus power
	LED indicators	Power LED Network Connect LED Indification LED
Input/output connectors	Ethernet input	x 1 RJ-45, 10/100/1000Mb Ethernet
	USB downstream ports	x 4 USB A type (USB 2.0)
	Video ouput	x 1 DVI-I connector for VGA or DVI
	Audio output 1	x 1 Line out phone jack
	Audio output 2	x 1 headphone
Max. Video resolution	FHD	2048 x 1152
Environmental	Operating temperature	0° C ~ 35° C
	Non-operating temperature	-30° C ~ 60° C
	Operating Humidity	10% ~ 90% (non-condensing)
	Non-operating Humidity	5% ~ 95%
Mechanical	Mounting	8 VESA holes; 4 spaced at 100mm centers and 4 spaced at 75mm centers
	Dimensions W x D x H	115mm x 115mm x 17.8mm
	Weight	TBD
Server OS supporting		XP,Vista, Win7, Win Server 2008R2, Linux
System requirement		WMS 2011 / MiniFrame SoftXpand 2011 / Useful Multiseat 2011
Regulatory		CB, FCC, CE, BSMI
Compliance		WEEE, RoHS
Optional		DVI to VGA adaptor / DVI to DVI cable(25cm) / DVI to VGA cable(25cm)


* Specification is subject to be changed without prior notice.

I/O indicator (unit: mm)



1. Microphone
2. Headphone
3. LED indicators
Power LED
Network connect LED
Identification LED
4. USB A type down stream port x 4
5. Line out
6. RJ-45 Ethernet connetor
7. DVI-I Connector
8. DC 12V in

Cable installation

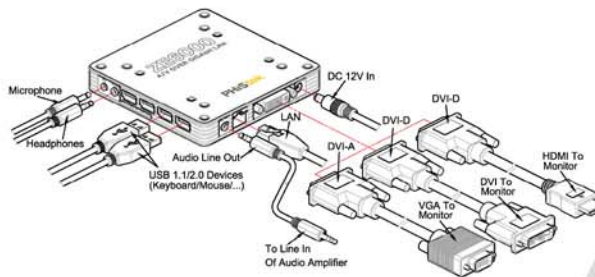

VESA Mounting

(Patent applying)

